



SLD75

A LED dedicated version of our famous SL75 lighting cove, SLD75 is a completely customizable solution, guaranteeing the perfect size for your setting. With a low UGR, the LED module, combined with different lenses – prismatic polycarbonate diffuser or PMMA diffuser –, brings you the ideal solution for office lighting. SLD75 fitted with standard poly lenses is perfect for general lighting and even comes as standard with pre-set dimming to provide the right amount of light in the right place.


[SUPERMODULAR.COM/EN/SLD75](https://supermodular.com/en/sld75)




SLD75
LE METTIS, METZ (FR)
DENU ET PARADON

SLD75

MOUNTING & SECTION

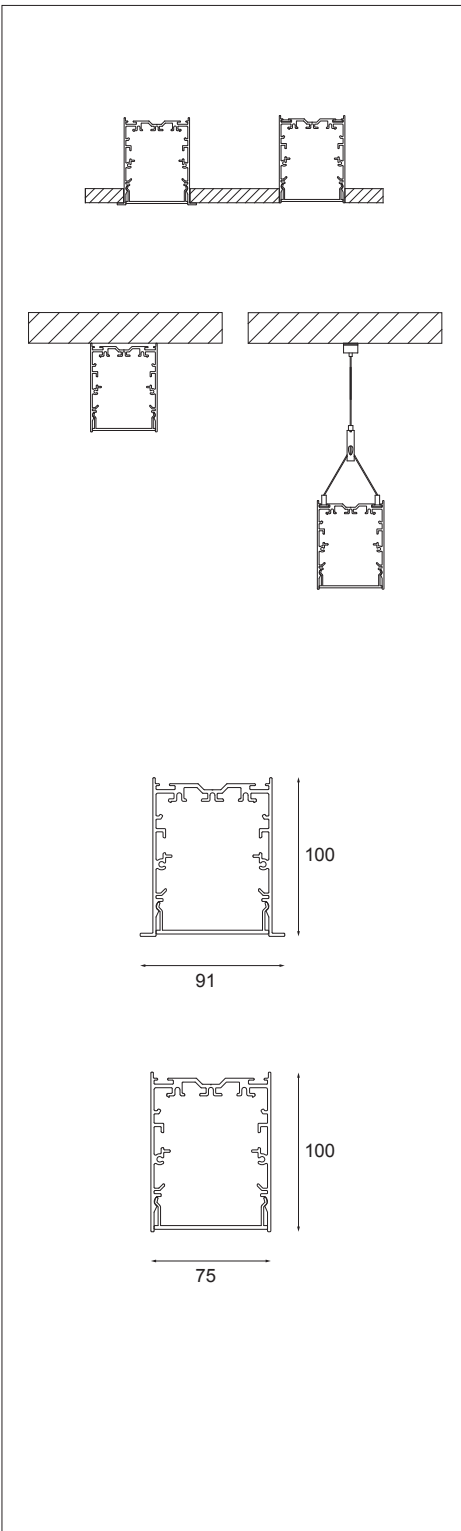

COMPONENTS

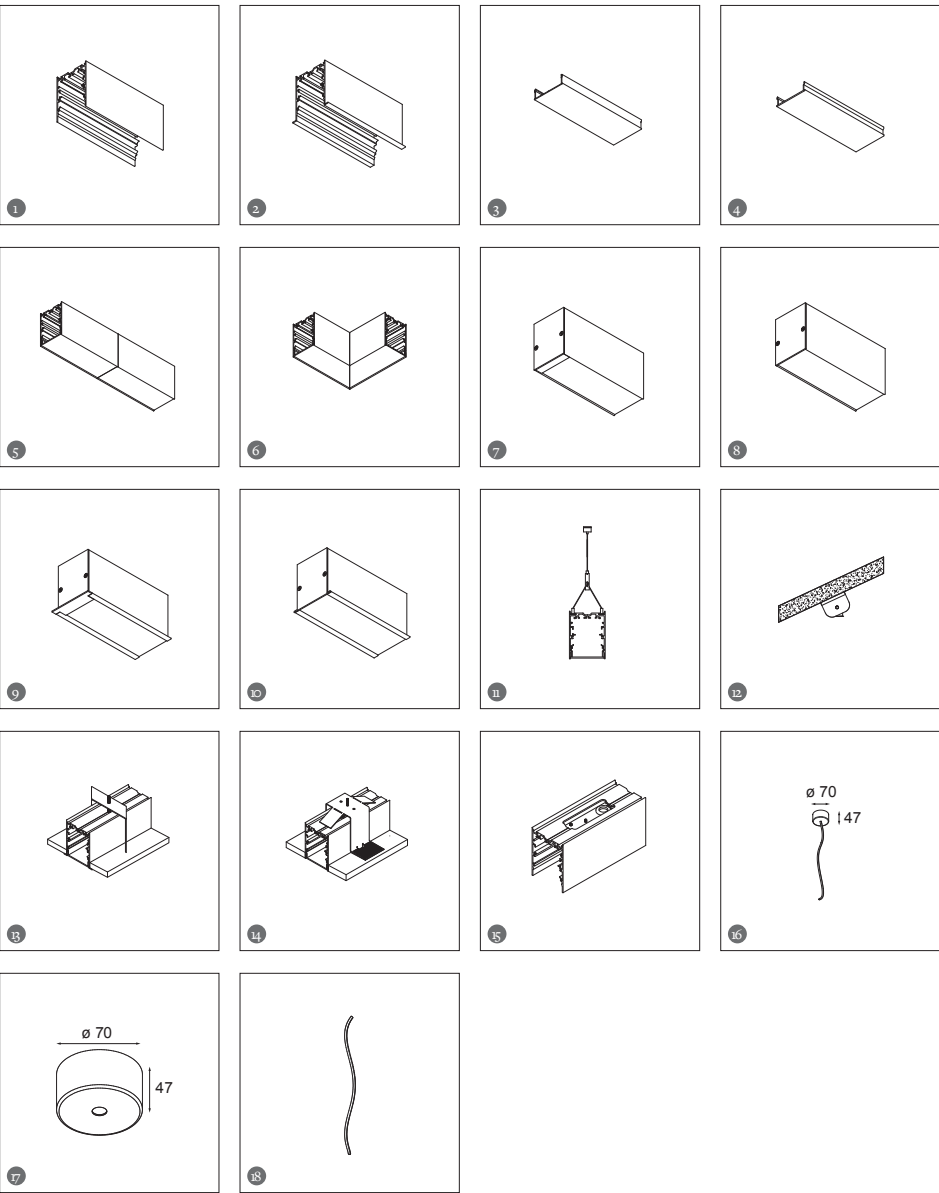


COMPONENTS

PROFILE VARIATION	
93550007	SLD75 PROFILE ALU/M (1)
93550009	SLD75 PROFILE WHITE STRUC/M (1)
93550032	SLD75 PROFILE BLACK STRUC/M (1)
93552004	SLD75 PROFILE FLANGE ALU/M (2)
93552009	SLD75 PROFILE FLANGE WHITE STRUC/M (2)
93552032	SLD75 PROFILE FLANGE BLACK STRUC/M (2)
93550205	SLD75 COVER ALU/M (3)
93550209	SLD75 COVER WHITE STRUC/M (3)
93550232	SLD75 COVER BLACK STRUC/M (3)
93550115	SLD75 POLY/M (4)
93550116	SLD75 PMMA/M (4)
93550118	SLD75 PRISMATIC POLY CLEAR/M (4)
CONNECTIONS	
93550050	SLD75 CONNECTION 180° (5)
93550060	SLD75 CONNECTION 90° (6)
ENDPLATES	
93550181	SLD75 ENDPLATE INCL. INNER FLANGE ALU (7)
93550982	SLD75 ENDPLATE INCL. INNER FLANGE WHITE STRUC (7)
93550881	SLD75 ENDPLATE INCL. INNER FLANGE BLACK STRUC (7)
93550183	SLD75 ENDPLATE EXCL. INNER FLANGE ALU (8)
93550983	SLD75 ENDPLATE EXCL. INNER FLANGE WHITE STRUC (8)
93550883	SLD75 ENDPLATE EXCL. INNER FLANGE BLACK STRUC (8)
93552182	SLD75 FLANGE ENDPLATE INCL. INNER FLANGE ALU (9)
93552982	SLD75 FLANGE ENDPLATE INCL. INNER FLANGE WHITE STRUC (9)
93552881	SLD75 FLANGE ENDPLATE INCL. INNER FLANGE BLACK STRUC (9)
93552184	SLD75 FLANGE ENDPLATE EXCL. INNER FLANGE ALU (10)
93552983	SLD75 FLANGE ENDPLATE EXCL. INNER FLANGE WHITE STRUC (10)
93552883	SLD75 FLANGE ENDPLATE EXCL. INNER FLANGE BLACK STRUC (10)
FIXATION / MOUNTING	
93550145	SLD75 TWIN SUSPENSION 4M ALU (11)
93550945	SLD75 TWIN SUSPENSION 4M WHITE STRUC (11)
93550845	SLD75 TWIN SUSPENSION 4M BLACK STRUC (11)
93001005	SLD75 HINGE ALU (12)
93001009	SLD75 HINGE WHITE STRUC (12)
93001032	SLD75 HINGE BLACK STRUC (12)
93550999	SLD75 RECESSED BRACKET (13)
93550997	SLD75 RECESSED BRACKET TRIMLESS (14)

ELECTRICAL SUPPLY	
93550100	SLD75 HOLE FOR POWER SUPPLY 3-5P (15)
93002003	POWER FEED KIT 2M (TRANSPARANT CABLE) 3X 1.5MM² ALU (16)
93002903	POWER FEED KIT 2M (TRANSPARANT CABLE) 3X 1.5MM² WH (16)
93003203	POWER FEED KIT 2M (TRANSPARANT CABLE) 3X 1.5MM² BL (16)
93002005	POWER FEED KIT 2M (TRANSPARANT CABLE) 5X 1.5MM² ALU (16)
93002905	POWER FEED KIT 2M (TRANSPARANT CABLE) 5X 1.5MM² WH (16)
93003205	POWER FEED KIT 2M (TRANSPARANT CABLE) 5X 1.5MM² BL (16)
93003303	POWER FEED KIT 2M (TRANSPARANT CABLE) 6X 0.75MM² ALU (16)
93003304	POWER FEED KIT 2M (TRANSPARANT CABLE) 6X 0.75MM² WH (16)
93003305	POWER FEED KIT 2M (TRANSPARANT CABLE) 6X 0.75MM² BL (16)
93002151	CONNECTION BOX FOR TRANSPARANT CABLE 3X 1.5MM² ALU (17)
93002951	CONNECTION BOX FOR TRANSPARANT CABLE 3X 1.5MM² WH (17)
93003151	CONNECTION BOX FOR TRANSPARANT CABLE 3X 1.5MM² BL (17)
93002251	CONNECTION BOX FOR TRANSPARANT CABLE 5X 1.5MM² ALU (17)
93003951	CONNECTION BOX FOR TRANSPARANT CABLE 5X 1.5MM² WH (17)
93003251	CONNECTION BOX FOR TRANSPARANT CABLE 5X 1.5MM² BL (17)
93003451	CONNECTION BOX FOR TRANSPARANT CABLE 6X 0.75MM² ALU (17)
93003551	CONNECTION BOX FOR TRANSPARANT CABLE 6X 0.75MM² WH (17)
93003651	CONNECTION BOX FOR TRANSPARANT CABLE 6X 0.75MM² BL (17)
93002152	TRANSPARANT CABLE/M 3X 1.5MM² (18)
93002252	TRANSPARANT CABLE/M 5X 1.5MM² (18)
93003452	TRANSPARANT CABLE/M 6X 0.75MM² (18)
SUPPLEMENTS	
93000101	RAL SETUP CHARGE (EXCEPT WHITE STRUC AND BLACK STRUC)
93002053	RAL SUPPL. POWERFEED KIT / CONNECTION BOX
93550109	SLD75 RAL SUPPL. PROFILE/M
93552108	SLD75 RAL SUPPL. PROFILE FLANGE/M
93550210	SLD75 RAL SUPPL. COVER/M
93550188	SLD75 70 RAL SUPPL. ENDPLATE
93552000	SUPPL. EXTRA CIRCUIT/M
93551011	EMERGENCY PACK 3H.


SLD75

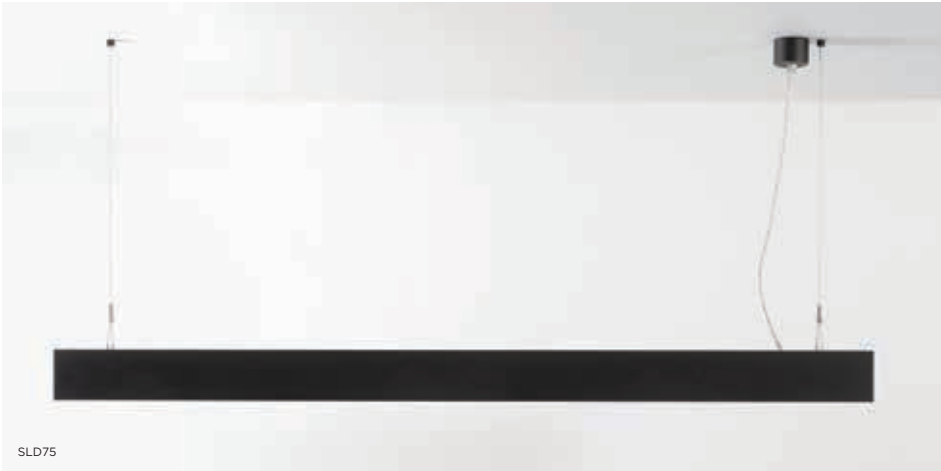

LIGHTING UNITS

SLD75 FORTIMO LEDLINE GI

ECO LED



MED POWER LED INCL.

9W/LED LINE


	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
2x	93554502	96554502	98554502	93554002	96554002	98554002	93554102	96554102	98554102	560
3x	93554503	96554503	98554503	93554003	96554003	98554003	93554103	96554103	98554103	840
4x	93554504	96554504	98554504	93554004	96554004	98554004	93554104	96554104	98554104	1120
5x	93554505	96554505	98554505	93554005	96554005	98554005	93554105	96554105	98554105	1400
6x	93554506	96554506	98554506	93554006	96554006	98554006	93554106	96554106	98554106	1680
7x	93554507	96554507	98554507	93554007	96554007	98554007	93554107	96554107	98554107	1960

LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
POLY	1479	34	44	23
PMMA	2079	34	61	23
PRISMATIC	1868	34	55	20

SLD75 FORTIMO LEDLINE PRESET 75% LIGHT OUTPUT GI

ECO LED



MED POWER LED INCL.

6.6W/LED LINE


	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
2x	93557002	96557002	98557002	93556502	96556502	98556502	93556602	96556602	98556602	560
3x	93557003	96557003	98557003	93556503	96556503	98556503	93556603	96556603	98556603	840
4x	93557004	96557004	98557004	93556504	96556504	98556504	93556604	96556604	98556604	1120
5x	93557005	96557005	98557005	93556505	96556505	98556505	93556605	96556605	98556605	1400
6x	93557006	96557006	98557006	93556506	96556506	98556506	93556606	96556606	98556606	1680
7x	93557007	96557007	98557007	93556507	96556507	98556507	93556607	96556607	98556607	1960
8x	93557008	96557008	98557008	93556508	96556508	98556508	93556608	96556608	98556608	2240

LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
POLY	1171	26	45	22
PMMA	1646	26	63	22
PRISMATIC	1479	26	57	20

SLD75 FORTIMO LEDLINE PRESET 50% LIGHT OUTPUT GI

ECO LED



MED POWER LED INCL.

4.3W/LED LINE

	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
3x	93559603	96559603	98559603	93558503	96558503	98558503	93558603	96558603	98558603	840
4x	93559604	96559604	98559604	93558504	96558504	98558504	93558604	96558604	98558604	1120
5x	93559605	96559605	98559605	93558505	96558505	98558505	93558605	96558605	98558605	1400
6x	93559606	96559606	98559606	93558506	96558506	98558506	93558606	96558606	98558606	1680
7x	93559607	96559607	98559607	93558507	96558507	96558507	93558607	96558607	98558607	1960
8x	93559608	96559608	98559608	93558508	96558508	98558508	93558608	96558608	98558608	2240


LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
POLY	715	18	40	20
PMMA	1005	18	56	20
PRISMATIC	904	18	50	18

SLD75

LIGHTING UNITS

SLD75 FORTIMO LEDLINE GI + LENS 50° ECO LED



MED POWER LED INCL.
9W/LED LINE


	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
2x	93555502	96555502	98555502	93555002	96555002	98555002	93555102	96555102	98555102	560
3x	93555503	96555503	98555503	93555003	96555003	98555003	93555103	96555103	98555103	840
4x	93555504	96555504	98555504	93555004	96555004	98555004	93555104	96555104	98555104	1120
5x	93555505	96555505	98555505	93555005	96555005	98555005	93555105	96555105	98555105	1400
6x	93555506	96555506	98555506	93555006	96555006	98555006	93555106	96555106	98555106	1680
7x	93555507	96555507	98555507	93555007	96555007	98555007	93555107	96555107	98555107	1960

LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
LENS 50° POLY	1929	34	57	23
LENS 50° PMMA	2793	34	82	20
LENS 50° PRISMATIC	2619	34	77	13

! COMBINE WITH A PRISMATIC POLY CLEAR TO CREATE AN OFFICE COMPLIANT SOLUTION

SLD75 FORTIMO LEDLINE GI + LENS 80° ECO LED



MED POWER LED INCL.
9W/LED LINE

	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
2x	93557102	96557102	98557102	93556002	96556002	98556002	93556102	96556102	98556102	560
3x	93557103	96557103	98557103	93556003	96556003	98556003	93556103	96556103	98556103	840
4x	93557104	96557104	98557104	93556004	96556004	98556004	93556104	96556104	98556104	1120
5x	93557105	96557105	98557105	93556005	96556005	98556005	93556105	96556105	98556105	1400
6x	93557106	96557106	98557106	93556006	96556006	98556006	93556106	96556106	98556106	1680
7x	93557107	96557107	98557107	93556007	96556007	98556007	93556107	96556107	98556107	1960


LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
LENS 80° POLY	1753	34	52	23
LENS 80° PMMA	2493	34	73	21
LENS 80° PRISMATIC	2288	34	68	17

! COMBINE WITH A PRISMATIC POLY CLEAR TO CREATE AN OFFICE COMPLIANT SOLUTION

LIGHTING UNITS

SLD75 OFFICE COMPLIANT FORTIMO LEDLINE GI + LENS 50° ECO LED



MED POWER LED INCL.
3W/LED LINE


	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
4x	93558204	96558204	98558204	93558004	96558004	98558004	93558104	96558104	98558104	1120
5x	93558205	96558205	98558205	93558005	96558005	98558005	93558105	96558105	98558105	1400
6x	93558206	96558206	98558206	93558006	96558006	98558006	93558106	96558106	98558106	1680
7x	93558207	96558207	98558207	93558007	96558007	98558007	93558107	96558107	98558107	1960
8x	93558208	96558208	98558208	93558008	96558008	98558008	93558108	96558108	98558108	2240

LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
OFFICE COMPLIANT + LENS 50° PMMA	1351	18	75	17

! COMBINE WITH PMMA TO CREATE AN OFFICE COMPLIANT SOLUTION

SLD75 OFFICE COMPLIANT FORTIMO LEDLINE GI + LENS 80° ECO LED



MED POWER LED INCL.
3W/LED LINE

	2700K / CRI90+ NEW			3000K / CRI90+ UPGRADE			4000K / CRI90+ UPGRADE			MOD
	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	NON-DIM	1-10V	DALI / PUSHDIM	
4x	93558904	96558904	98558904	93559004	96559004	98559004	93559104	96559104	98559104	1120
5x	93558905	96558905	98558905	93559005	96559005	98559005	93559105	96559105	98559105	1400
6x	93558906	96558906	98558906	93559006	96559006	98559006	93559106	96559106	98559106	1680
7x	93558907	96558907	98558907	93559007	96559007	98559007	93559107	96559107	98559107	1960
8x	93558908	96558908	98558908	93559008	96559008	98559008	93559108	96559108	98559108	2240


LUMINAIRE OUTPUT & POWER CONSUMPTION (FOR 3000K)

	lm/m	W/m	lm/W	UGR
OFFICE COMPLIANT + LENS 80° PMMA	1286	17	76	19

! COMBINE WITH PMMA TO CREATE AN OFFICE COMPLIANT SOLUTION

LIGHTING UNITS | UP

SLD75 LED-STRIP 24V GE ECO LED



	2700K / CRI90+	3000K / CRI90+	3000K / CRI90+
mounted/m	93000503	93000501	93551534
24V connection	93551532	93000502	93551532

DRIVERS	
93009520	LED DRIVER 24V 60W
96009520	LED DRIVER 24V 60W 1-10V
93009542	LED DRIVER 24V 100W
98009542	LED DRIVER 24V 100W Dali

SLD75



SLD75
CINEMA, STENAY (FR)
CHRISTOPHE PRESLE